


Safety glasses GS5000I5

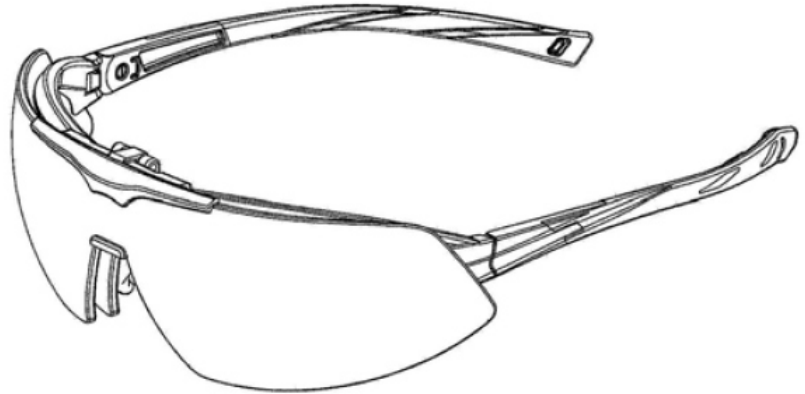

Special features

- This utility spectacle encompasses ultimate vision protection with a stylish design and various functional features.
- Dual lens and frame with unique outer flip lens system to provide users with multiple options. Flip the outer lens up for general applications. Flip the outer lens down for applications where tinted lenses are needed.
- 3-angle adjustable flip lens allows users to freely adapt to different working procedures.
- Outer flip lens is available in two IR Filter lens options. Ideal for use around welding sites and in cutting and brazing applications.
- Newly designed adjustable nosepiece provides 3 different angles, allowing the user to find the most comfortable fit.
- Co-Material cushioned temple tips provide non-slip comfort.
- Lenses filter 99% of harmful UV rays.
- Exceeds ANSI Z87.1-2003 High Impact Requirements.

General specifications

Lens thickness	2,20 mm	PD	68 mm
Lens base	8 curve	Weight	47 gm
Lens size vertical	45 mm	Lens size diagonal	141 mm
Bridge	15 mm	Temple length (lens-tip)	161 mm
Overall width (hinge-hinge)	128 mm	Closest point between lenses	n/a
Closest point between temple tips	55 mm		

Markings

Lens: As per standard.
Frame: As per standard.

Packaging

1 pc in a polybag; 12 pcs in an inner box; 30 pcs in a case.

Standards

Meets ANSI Z87.1.